




1 Crown installation

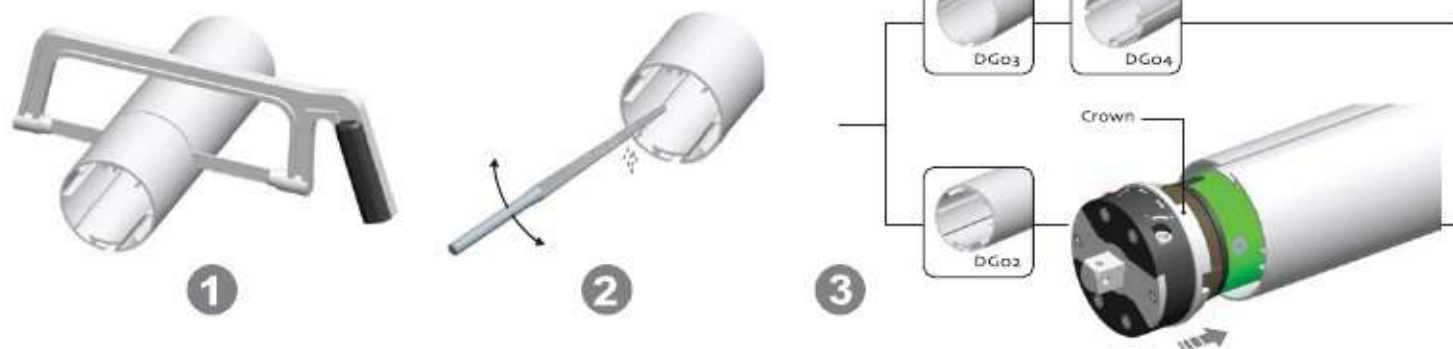


2 Drive adapter installation

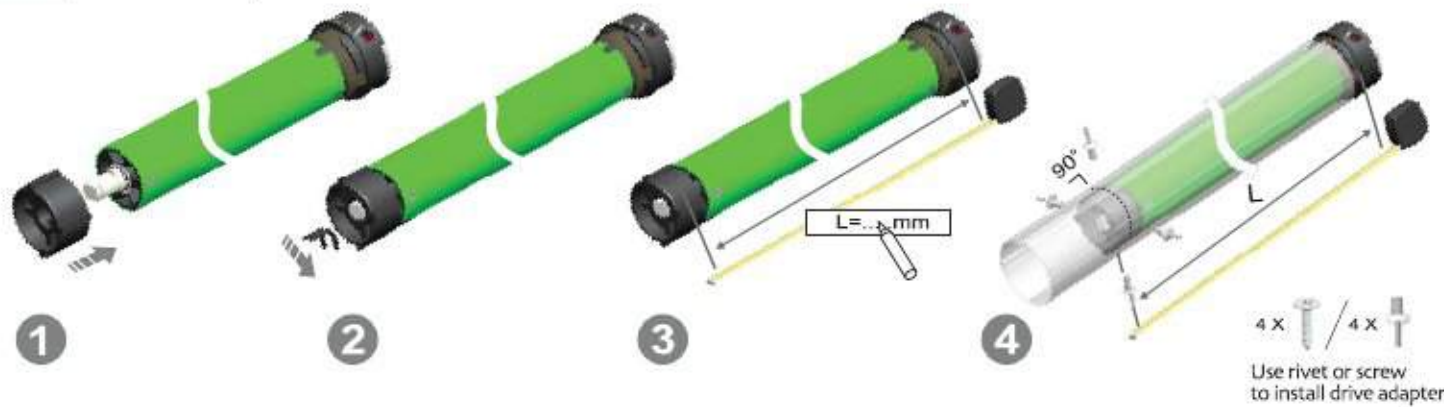


3 Bracket installation

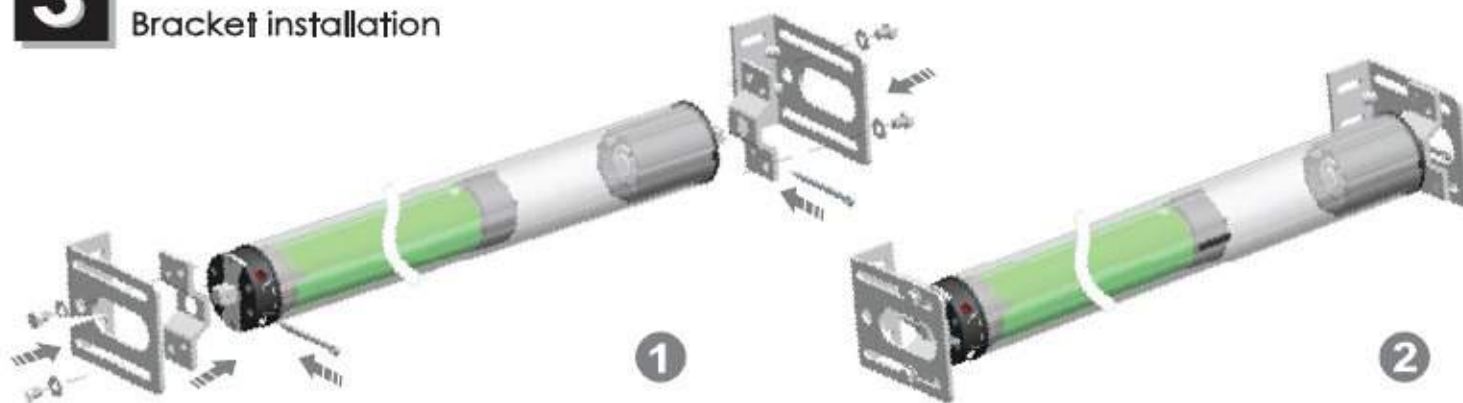


4 Circuit installation

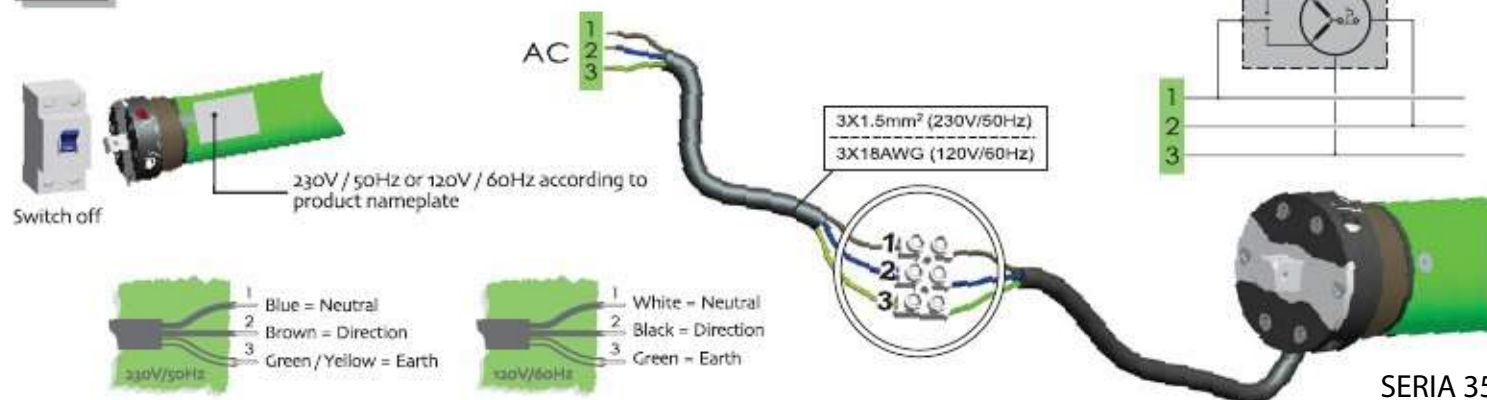


5 Programming the first emitter The first method

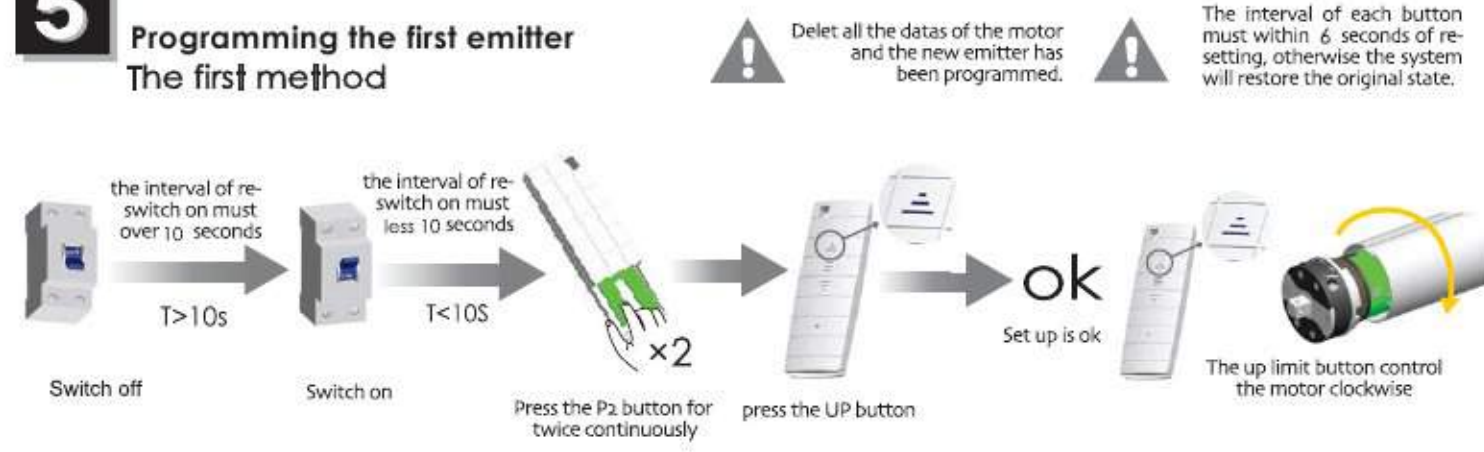

The second method

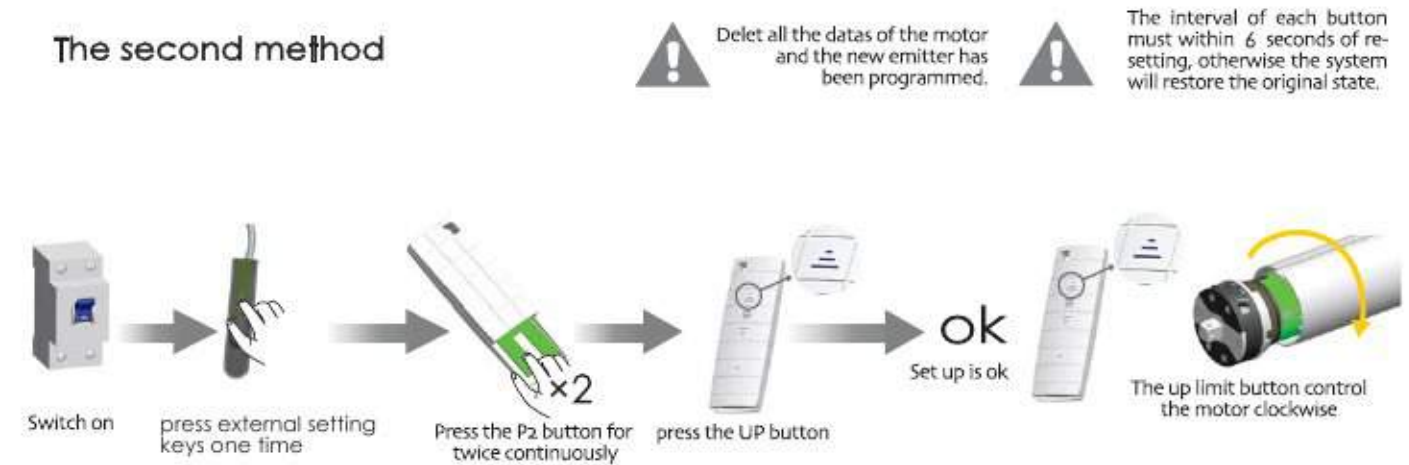

6 Up limit setting

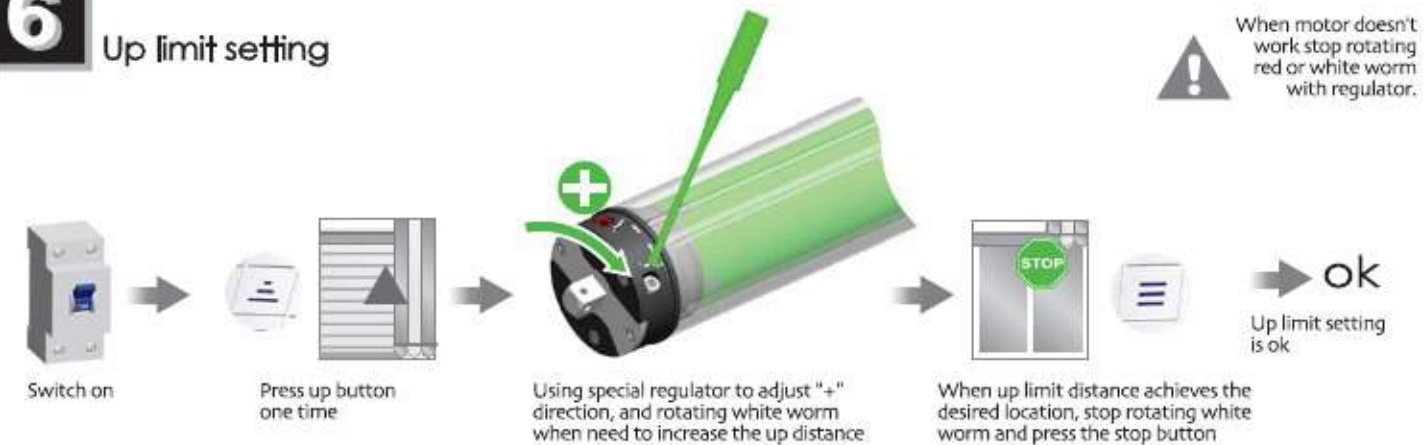

7 Down limit setting






Direction setting

Additional Function




Dot-move setting

Additional Function

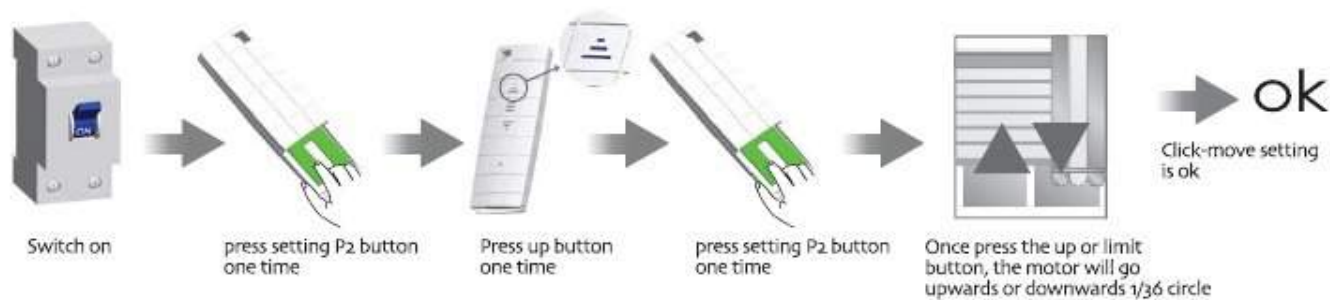


Add Emitter

Additional Function

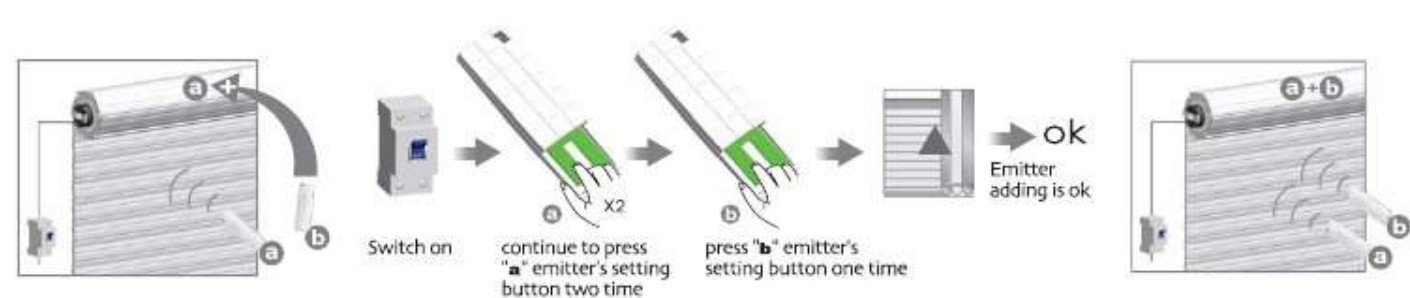

Cancel Emitter

Additional Function

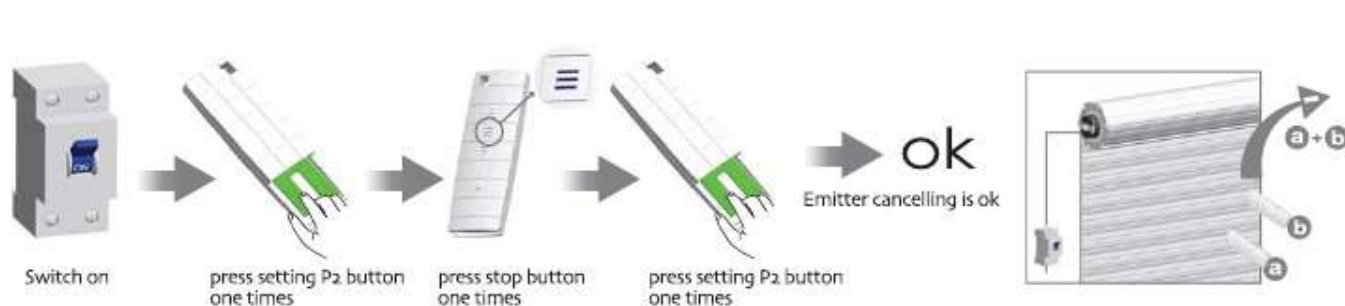

All controls support 433MHz & 868MHz
All controls support 230V/50Hz & 120V/60Hz

AC TUBULAR MOTOR

R/A : Radio
Mechanic Limit + Built-in Receiver

By DM45R/A DM45RM/A
DM45RQ/A

Version No. : A/00



DM45R/A Tubular Motor Specification



Technical Support




One DM45R/A motor maximum can store 20 channels, over 20 channels, if still need add new channels, it will be repeating covered in turn from second channel.

In the process of set up emitter and R type motor, every time press the key, motor will whistle one time as the signal (not press any key within 4 seconds after the whistle, the motor will turn to the original state). After the success of the set up, motor continuous whistle many times as signal.

Receiver in the mode of dot function, press up key and down key within 2 seconds, emitter-control motor working in dot function; if continuous press more than 2 seconds motor will last working.

Group control channel match code is unworkable, when group channel work together, the emitter can't be programmed, while function of dot-move, emitter-add and emitter-cancel still means.

Control Range

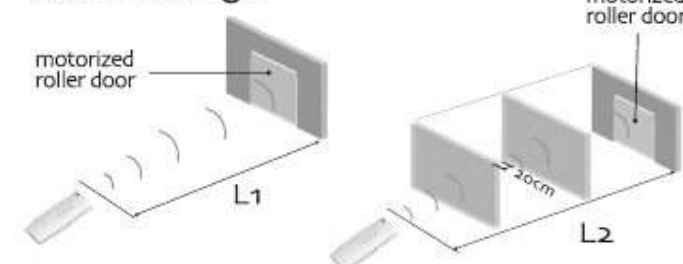

	L1 Open	L2 Partition	Emission frequency
230V/50Hz	200m	35m	433.92MHz
120V/60Hz	200m	35m	



Matchable emitter and motors

Technical Support



Attention

