


DC2902 Emitter Specification

Version NO.: A/00

T Type specification

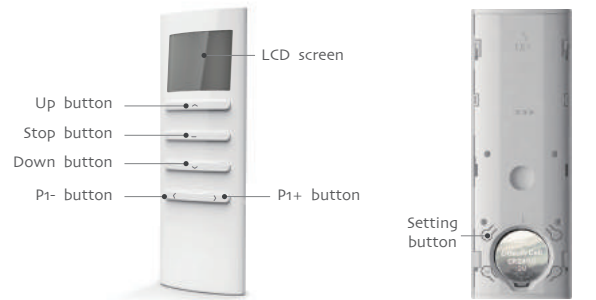

DC2902
15 - channel LCD emitter

DC2902 Back side

T Technical support

Technical specification	Function instruction
<ul style="list-style-type: none"> • Input voltage: 3V(Cr2450) • Transmitting frequency: 433MHz • Transmitting power: 10 milliwatt • Operating temperature: -10°C—50°C • Transmission distance: 200 meters open office, 35 meters on two walls 	<p>DC2902 is 15-channel LCD emitter. One number of LCD screen means one control channel. Press "channel choose" button P1- (number descending) or P1+ (number increasing) to change the channel. On the analogy of this, loose finger when the indicator light move to suitable channel that you select effective channel. If LCD screen number show "o" that means all channels if effective (group control state).</p> <p>CAUTION RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS</p> <p>Notice: transmitter do not exposed to moisture and strike, so as not to affect life. When you use transmitter, if found emission distance obviously short or less sensitive, please change another same new battery. Please have batteries for recycling.</p>

